

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

PATENT APPLICATION

INVENTOR: Joseph M. CANNON; James A. JOHANSON; & Doreen M. MICHELETTI

CASE: CANNON 36-37-2

TITLE: VOICE MESSAGING SYSTEM CALLER RING BYPASS CONTROL

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Enclosed are the following papers relating to the above-named application for patent:


Specification (including claims and Abstract) - 22 pages
5 Informal sheets of drawing(s)
1 Assignment with Cover Sheet
Declaration and Power of Attorney

CLAIMS AS FILE				
	NO. FILED	NO. EXTRA	RATE	CALCULATIONS
Total Claims	21 - 20 =	1	x \$22 =	\$22
Independent Claims	6 - 3 =	3	x \$82 =	\$246
Multiple Dependent Claim(s), if applicable			\$270 =	\$0
Basic Fee				\$790
			TOTAL FEE:	\$1058

Please file the application and charge **Lucent Technologies Deposit Account No. 12-2325** the amount of **\$1058** to cover the filing fee. Duplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 12-2325** as required to correct the error.

Please address all correspondence to **FARKAS & MANELLI, PLLC, 2000 M Street, N.W. 7th Floor, Washington, DC 20036-3307**, and all telephone calls to William H. Bollman at his Washington, DC local number of (202) 261-1000.

Respectfully submitted,

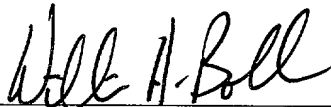

William H. Bollman

Reg. No.: 36,457

Attorney for Applicant(s)

Date: November 12, 1998

Farkas & Manelli, PLLC
2000 M Street, N.W. 7th Floor
Washington, DC 20036-3307
(202) 261-1000

APPLICATION UNDER UNITED STATES PATENT LAWS

Invention: **VOICE MESSAGING SYSTEM CALLER RING BYPASS CONTROL**

Inventor(s): Joseph M. CANNON;
James A. JOHANSON; and
Doreen M. MICHELETTI

Farkas & Manelli P.L.L.C.
2000 M Street, N.W.
7th Floor
Washington, D.C. 20036-3307
Attorneys
Telephone: (202) 261-1000

This is a:

- ☐ [] Provisional Application
- ☒ [X] Regular Utility Application
- ☐ [] Continuing Application
- ☐ [] PCT National Phase Application
- ☐ [] Design Application
- ☐ [] Reissue Application
- ☐ [] Plant Application

SPECIFICATION

09190139 " 62106160

VOICE MESSAGING SYSTEM CALLER RING BYPASS CONTROL

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

This invention relates generally to a voice messaging system which is capable of recording an incoming voice message from a calling party. More particularly, it relates to a voice messaging system which allows a caller to bypass the necessity of an incoming call ring signal to the voice messaging system of a called party and instead proceed directly to either the playing of an outgoing greeting message or directly to the recording of a message.

2. Background of Related Art

Voice messaging systems (e.g., telephone answering devices) are useful devices for the home or small office. A conventional telephone answering device operates on a single telephone line and answers an incoming call to an unused (i.e., on-hook) telephone after a desired number of rings. Typically the number of rings may be set, e.g., to allow automatic pickup of the telephone call after two (2) rings, after four (4) rings, after eight (8) rings, etc.

After the desired number of rings, a telephone line interface in the telephone answering device places the telephone line in an off-hook condition, then plays an outgoing greeting message to the caller. After the outgoing greeting message is completed, the calling party is finally allowed to record a voice message in voice message memory of the telephone answering device. The user of the telephone answering device may replay the recorded voice message at a later time.

Fig. 5 illustrates an exemplary conventional telephone answering device **11** capable of answering an incoming call on a telephone line **17** after a predetermined number of rings.

In particular, in Fig. 5, a telephone answering device **11** is
5 connected to a telephone company central office **19** via a telephone line **17**. A telephone line interface (TLI) **21** in the telephone answering device **11** interfaces with the telephone line **17**.

The telephone answering device **11** further includes a controller **23**, an alphanumeric keypad **29**, a display **33** for showing the
10 operations of the controller **23** and/or for displaying call related information if available in the telephone answering device **11**.

The alphanumeric keypad **29** allows a user to select any function of the various conventional modes of operation, including the playback of voice messages stored in the telephone answering device **11**.

15 A voice recorder/playback module **25** including a speaker **117** and a microphone **119** allow recording and playback of voice messages to and from voice message memory **27**. The voice message memory **27** is preferably a suitable non-volatile memory, e.g., Flash memory.

20 The controller **23** can be any suitable processor, e.g., microprocessor, microcontroller, or digital signal processor (DSP), and controls the general operation of the telephone answering device **11**.

The telephone line interface **21** provides the conventional isolation, DC and AC impedance, as required by typical telephone
25 company standards. The telephone line interface **21** also provides a ring detect signal to the controller **23** based on the detection of an incoming ring signal on the telephone line **17**.

The ring detect signal indicates ring signals received on the telephone line **17** to the controller **23**. A ring setting switch **310** or
30 similarly functioning device sets the required number of ring signals the

telephone answering device 11 receives over the telephone line 17 before the telephone answering device will instruct the telephone line interface 21 to place the telephone line 17 in an off-hook condition. Preferably, the ring setting switch 310 will have a plurality of settings, e.g., requiring two
5 (2) rings 302, requiring four (4) rings 304, or requiring eight (8) rings 306.

After a desired number of ring signals are detected by the controller 24, the telephone line interface 21 is caused to place the telephone line in an off-hook state. With the telephone line 17 in an off-hook condition, the controller 23 instructs the voice recorder/playback
10 audio module 25 to play a pre-recorded outgoing greeting message stored in the voice message memory 27 to the calling party over the telephone line 17. Upon completion of the playback of the outgoing greeting message, the calling party is then finally allowed to record a voice message in the voice message memory 27 under the control of controller
15 23.

In some instances, the calling party may be aware or believe that the called party is not available, or may not want to bother the called party for a minor message. Instead, the calling party might only desire to record a voice message on the telephone answering device of the called
20 party for playback at the called party's convenience. This may also be the case in a business setting where a receptionist or an office assistant answers the telephone for the called party. The caller may wish to simply record a message in the called party's voice messaging system instead of speaking with the receptionist. This technique may waste the caller's time
25 by requiring the caller to explain to the receptionist the purpose of the call, and eventually allow the caller to record a voice message in the called party's voice messaging system anyway.

In any event, the number of ring signals required by a voice messaging system, or the use of a receptionist or office assistant, are
30 conventionally under the control of the called party using the voice

messaging system. Thus, the caller must conventionally wait through as many rings signals as are required by a called voice messaging system, or must speak with a receptionist, whether they want to or not. This may often result in wasted time on the part of the calling party.

5 Accordingly, there exists a need for a voice messaging system, e.g., a telephone answering device, which allows the calling party sufficient control to instruct the called voice messaging system to bypass a default ring signal setting and go either directly to the playback of an outgoing greeting message, or directly to recording a voice message.

10

SUMMARY OF THE INVENTION

 In accordance with the principles of the present invention, a voice messaging system comprises a telephone line interface, a voice recorder/playback module, and a controller adapted to control functions of said voice messaging system. A ring signal bypass module is adapted to
15 detect a presence of a non-ring signal indicating a presence of an incoming call, and to cause the telephone line interface to place a telephone line in an off-hook condition before reception of an initial ring signal relating to the incoming call.

20 A method of allowing bypass of a ring signal in a voice messaging system in accordance with another aspect of the present invention comprises receiving a non-ring signal indicating a presence of an incoming call to the voice messaging system. The incoming call is answered by the voice messaging system before a reception of any ring
25 signal.

 A method of allowing a calling party to bypass a ring signal in a voice messaging system of a called party, the voice messaging system including voice message memory for recording a voice message, in accordance with another aspect of the present invention comprises
30 providing a ring signal bypass module in the voice messaging system.

The ring signal bypass module is activated based on a request from the calling party. All ring signals to the voice messaging system are bypassed by answering a call from the calling party before a reception of any ring signal.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Features and advantages of the present invention will become apparent to those skilled in the art from the following description with reference to the drawings, in which:

10 Fig. 1 illustrates a telephone answering device constructed in accordance with the principles of the present invention to allow a caller to bypass an incoming telephone ring signal and/or playing of an outgoing greeting message to allow direct recording of a voice message.

15 Fig. 2 is a flow chart illustrating the process by which a voice messaging system constructed in accordance with the principles of the present invention, e.g., as shown in Fig. 1, allows a caller to bypass the incoming telephone ring signal and/or playing of an outgoing greeting message to allow direct recording of a voice message.

20 Fig. 3 illustrates an exemplary process at a customer premises equipment including ring bypass features, e.g., as shown in Fig. 1.

 Fig. 4 illustrates another exemplary process whereby the principles of the present invention are implemented at the called party's customer premises equipment.

25 Fig. 5 illustrates a conventional telephone answering device operating on a single telephone line.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

30 The present invention provides a voice messaging system that has added control over its ring circuitry such that a central office can

signal the voice messaging system to establish that no ring signaling should occur. Instead, the voice messaging system will either substantially immediately playback the outgoing greeting message to the caller and then allow the caller to record a voice message, or allow the
5 caller to record a voice message without playback of the outgoing greeting message.

This 'no ring' signaling from the central office is referred to herein as a DirectAnswer service. DirectAnswer signaling service allows a caller to control a called party's voice messaging system to the extent
10 that a ring signal can be avoided and a recording process will be initiated substantially immediately, without ringing.

The disclosed embodiments relate specifically to a telephone answering device which allows a calling party to record a voice message without first requiring a ring signal. However, the principles of
15 the present invention relate equally to voice messaging systems in general, e.g., to a voice mail system typically associated with a private branch exchange (PBX) often found in businesses.

Fig. 1 illustrates a telephone answering device, indicated generally at **10**, capable of allowing a calling party to bypass the
20 requirement for a predetermined or default number of telephone ring signals before automatically recording a voice message of the calling party, in accordance with the principles of the present invention.

In the embodiment of Fig. 1, the telephone answering device **10** includes a telephone line interface (TLI) **12** for interconnection with a
25 central office **14** via a telephone line **16**. The telephone answering device **10** further includes a controller **24**, a default ring setting module **320**, and a voice recorder/playback module **18**. The controller **24** can be any suitable processor, e.g., microprocessor, microcontroller, or digital signal processor (DSP).

5 The voice recorder/playback module **18** includes a speaker **117** for playback of recorded voice messages, a microphone **119** for recording a custom outgoing greeting message, and voice message memory **21**, each otherwise as in a conventional telephone answering device, e.g., as shown in Fig. 5.

10 The telephone line interface **12** provides the conventional isolation, DC and AC impedance, as required by typical telephone company standards. Moreover, in accordance with the principles of the present invention, the telephone line interface **12** is capable of receiving non-ring type signaling indicating the presence of an incoming call. For instance, in the disclosed embodiment, the telephone line interface is capable of detecting a line reversal invoked by the central office **14**.

15 For conventional operation, the telephone line interface **12** also provides a ring detect signal to the controller **24** based on the detection of an incoming ring signal on the telephone line **16**. A ring setting switch **310** or similarly functioning device sets the required number of ring signals the telephone answering device **10** receives over the telephone line **16** before the telephone answering device **10** will instruct the telephone line interface **12** to place the telephone line **16** in an off-hook condition.

20 Importantly, the exemplary embodiment of a telephone answering device **10** as shown and described with reference to Fig. 1 further includes a ring signal bypass module **26**.

25 The ring signal bypass module **26** is preferably a software module operating within the program code of the controller **24**. However, it is within the principles of the present invention to implement the ring signal bypass module **26** separate from the controller **24**. In any event, the ring signal bypass module **26** is in communication with the telephone line interface **12** and/or the controller **24**.

1 In addition to conventional operation, the telephone
answering device **10** in accordance with the principles of the present
invention allows a calling party to signal a central office **14** to not ring the
called party, which in turn signals the telephone answering device **10** of
5 the called party, e.g., using DirectAnswer, to instruct that no ring signals
should occur before a recording process begins.

Accordingly, in operation, the ring signal bypass module **26**
receives an indication from the telephone line interface **12** of the
occurrence of DirectAnswer signaling from the central office **14**. The
10 DirectAnswer signaling from the central office **14** is initiated by the caller
using any appropriate signaling, e.g., by input of a special code using an
alphanumeric keypad at the calling party's telephone.

A calling party may signal a central office **14** for
DirectAnswer service to occur in any appropriate way. For instance, the
15 calling party may dial a predetermined code either before or after the
digits of the called party are dialed. In one disclosed embodiment, the
predetermined code to be dialed on an alphanumeric keypad by a calling
party is "*77", which is dialed before the digits of a telephone number. Of
course, the present invention relates equally to any particular code and/or
20 any particular timing for entering the code from the calling party's
telephone. Accordingly, the ring signal bypass module **26** provides the
calling party with control over the telephone answering device **10** of the
called party such that the ring signal of the telephone answering device **10**
can be bypassed and a voice message can be substantially immediately
25 recorded by the calling party.

In response to the request from the calling party for
DirectAnswer service to be signaled to the called party, the central office
14 will appropriately signal the called party's telephone line **16**, e.g., with a
'line reversal' to the called party's telephone line, an FSK transmission, or
30 a special ring cadence.

5 If the called party's voice messaging system has DirectAnswer capability, then the telephone line interface **12** will detect the line reversal, FSK transmission, or special ring cadence from the central office and interpret the same as signaling to substantially immediately place the telephone line **16** in an off-hook condition and enter a recording phase. Depending upon a mode established in the controller **24** of the telephone answering device **10**, either an outgoing greeting message will be played and then the calling party will be allowed to record a voice message, or the calling party will be allowed to record a voice message with or without playback of the outgoing greeting message.

15 An appropriate signaling module, e.g., a DirectAnswer signaling module **30** at the central office **14** determines the existence of a request from a calling party for DirectAnswer service to be signaled to a called party. The DirectAnswer signaling module **30** also signals the appropriate line card in the central office **14** to provide the appropriate signaling to the telephone line **16**, e.g., a line reversal, FSK transmission, or special ring cadence.

20 As in conventional telephone answering devices, the ring select switch **310** and associated ring settings **302-306** in the telephone answering device **10** establish a default ring setting which will occur unless the caller instructs the telephone answering device **10** to bypass an incoming ring signal and take the telephone line **16** off-hook. Thus, if the called party does not have a telephone answering device capable of bypassing a ring signal, e.g., using DirectAnswer service, then the telephone answering device which the user does have connected to the telephone line **16** will function in a conventional fashion, e.g., requiring a predetermined number of ring signals to occur before the telephone line **16** will be taken off-hook.

30 The telephone answering device **10** can be set to either play an outgoing greeting message upon receipt of DirectAnswer signaling

from the DirectAnswer signaling module 30 of the central office 14, or to skip playback of the outgoing greeting message and instead go directly to recording a voice message. If the telephone answering device 10 is set to skip playback of the outgoing greeting message, preferably a short beep
5 or other tone will be played over the telephone line 16 to the calling party to indicate a beginning of a recording process by the voice recorder/playback module 18.

In operation of the disclosed embodiment of a telephone answering device 10 in accordance with the principles of the present
10 invention, a calling party may desire to make a quick telephone call either without waiting for all ring signals to occur before leaving a voice message, or without speaking to an answering service or receptionist. In such a case, the calling party may initiate an appropriate control sequence to designate a telephone call as one which is to bypass the ring signal of
15 a telephone answering device 10 at the called party's telephone line. For example, the calling party may initiate an appropriate control sequence by inputting "*77" or other predefined code into an alphanumeric keypad for translation into appropriate dual tone, multiple frequency (DTMF) touch tones to the central office. Once the calling party initiates the requesting
20 control sequence, an appropriate bypass control module such as a DirectAnswer signaling module 30 associated with the telephone company central office 14 will recognize the control sequence and pass that information along with the dialed telephone number to the central office servicing the called party.

25 The appropriate line card in the telephone switch at the central office servicing the called party will signal the telephone line of the called party with an appropriate non-ring signal, e.g., by reversing the polarity of the telephone line. If the called party has a telephone answering device 10 in accordance with the principles of the present
30 invention, e.g., including a ring signal bypass module 26, the telephone

answering device **10** will immediately go off-hook and either play the outgoing greeting message and allow the calling party to record a voice message, or simply place a beep or short tone signal on the telephone line **16** and allow immediate recording of a voice message from the calling party, depending upon the pre-set mode of the ring signal bypass module **26** in the telephone answering device **10** established by its user.

If the telephone answering device **10** is not equipped with a ring signal bypass module **26** or a control sequence is not initiated by the calling party prior to the calling party dialing the telephone number, the telephone call is handled as a normal telephone call in which the telephone answering device **10** will detect a predetermined number of ring signals before answering the telephone call.

If the called party's telephone remains on-hook after a predetermined amount of time after the central office has signaled a no ring signal request, e.g., DirectAnswer signaling using a line reversal and/or appropriate DTMF tones as desired, the central office may proceed to send ring signals on the telephone line to the called party for functionality in a conventional sense.

For countries which currently use a line reversal for other services, additional signaling can be combined to create a 'no ring signal' request. For instance, the central office can transmit a line reversal followed by an appropriate DTMF bypass indicator tone (or predetermined sequence of tones) to differentiate the ring signal bypass feature from other offered services.

Fig. 2 illustrates a flow chart showing an exemplary process by which a telephone answering device **10** in accordance with the principles of the present invention allows a calling party to bypass the ring signal of a called party's telephone answering device **10**.

In step **202**, the calling party dials the appropriate telephone number of the called party.

5 In particular, in step **204** of Fig. 5, the calling party enters the appropriate ring signal bypass request code, e.g., "*77", using an off-hook telephone in communication with a central office. In an alternative embodiment, step **202** may be performed after step **204**, i.e., the ring signal bypass request code may be entered before the telephone number of the called party.

In step **206**, the central office servicing the calling party sends an appropriate data message to the central office of the called party requesting ring signal bypass for the incoming telephone call.

10 In step **208**, the central office servicing the called party signals the telephone line of the called party using a non-ring signal, e.g., using line reversal by the appropriate line card.

15 In step **210**, if the telephone line of the called party responds to the non-ring signal from the central office by taking its telephone answering device off-hook, the telephone call will be established in an otherwise conventional fashion but without the use of a ring signal to the called party, e.g., as shown in step **214**. However, if the telephone line of the called party is not taken off hook within a reasonable amount of time, e.g., within a couple seconds, the central office will proceed to provide
20 ring signals to the telephone line of the called party, as shown in step **212**, and the telephone call will be established in otherwise conventional fashion as shown in step **214**.

An alternative embodiment is shown in Fig. 3.

25 In particular, in Fig. 3, instead of utilizing a non-ring signal from a central office as in the embodiment shown in Fig. 2, the caller may dial a telephone as usual and, after the called telephone answering device goes off hook, enter a predetermined code to instruct the telephone answering device to enter a direct record mode.

30 For instance, in step **400** of Fig. 3, the telephone answering device receives a ring signal relating to an incoming call.

In step **402**, the telephone answering device goes off-hook, e.g., after receipt of the first ring signal.

In step **404**, the telephone answering device listens for the predetermined code sequence indicating the desirability for direct message recording.

In step **406**, a decision is made as to whether or not the predetermined code sequence was input by the caller within a predetermined amount of time, e.g., within 4 seconds. If it wasn't, then the telephone answering device provides a predetermined number of audible rings as shown in step **407**. If the telephone answering device is answered before the predetermined number of rings as shown in step **408**, then a normal telephone call would proceed as shown in step **412**. If, on the other hand, the telephone answering device is not answered before the predetermined number of rings, then an outgoing greeting message would be played to the caller as shown in step **411**, and a voice message would be recorded as shown in step **410**.

If, on the other hand, the predetermined sequence was detected in step **406**, the telephone answering device would directly allow recording of a voice message as shown in step **410**.

Thus, the called telephone would detect, e.g., the first incoming ring signal, go off-hook, and wait for the input by the caller of a particular predetermined key sequence, e.g., "77". If the predetermined key sequence is not detected by the called telephone, the telephone answering device would output an audible ring for the preset number of rings, then operate in an otherwise conventional fashion, e.g., by playing an outgoing greeting message and recording a voice message. However, if the predetermined key sequence is detected, the called telephone answering device would go directly into the voice message record mode.

The present invention can also be implemented only at the called party's customer premises equipment, as shown in the exemplary process of Fig. 4.

5 In particular, a telephone answering device constructed in accordance with the principles of the present invention receives a ring signal from a central office on a telephone line as shown in step **502**.

In step **504**, the telephone answering device goes off-hook without audibly ringing, e.g., after receipt of the first ring signal on the telephone line.

10 In step **506**, still preferably without notifying the called party of the presence of an incoming call, the telephone answering device plays an initial outgoing greeting message to the caller. This initial greeting message may have any content, but preferably informs the calling party of a choice to be made. The caller may either choose to audibly ring the
15 telephone answering device in the hopes that someone will answer the telephone, or may choose to bypass the audible rings to the called party and directly record a voice message. Preferably, if the calling party does not choose an option within a reasonable amount of time, e.g., within 5 seconds, a default choice will be presumed. Preferably, the default
20 setting may be preset by the user to either position (1), i.e., audible ring); or (2), i.e., no audible ring.

In particular, in response to step **506**, the calling party may select (1), either by choice or by default. The choice may be made, e.g., by depressing a particular key on the telephone keypad which is then
25 decoded by the controller **24** of the telephone answering device **10**, then the telephone answering device **10** will audibly ring up to a predetermined number of times as shown in step **508**. If the telephone answering device is answered before the predetermined number of rings as shown in step **510**, then a normal telephone call would proceed as shown in step **512**.
30 If, on the other hand, the telephone answering device is not answered

before the predetermined number of rings, then an outgoing greeting message would be played to the caller as shown in step **514**, and a voice message would be recorded as shown in step **516**.

- 5 If the calling party selects the option, either by choice or by default, to directly record a voice message without audibly ringing the telephone answering device, then the process will proceed directly to step **514** (or step **516** depending upon the application) and thus bypass the audible ring signal.

- 10 While the invention has been described with reference to the exemplary embodiments thereof, those skilled in the art will be able to make various modifications to the described embodiments of the invention without departing from the true spirit and scope of the invention.

CLAIMS

What is claimed is:

- 5 1. A voice messaging system, comprising:
a telephone line interface;
a voice recorder/playback module;
a controller adapted to control functions of said voice
messaging system; and
a ring signal bypass module adapted to detect a presence of
10 a non-ring signal indicating a presence of an incoming call, and to cause
said telephone line interface to place a telephone line in an off-hook
condition before reception of an initial ring signal relating to said incoming
call.
- 15 2. The voice messaging system according to claim 1,
wherein:
said telephone line interface is adapted to detect a line
reversal on said telephone line.
- 20 3. The voice messaging system according to claim 1,
wherein:
said voice messaging system is a telephone answering
device.
- 25 4. A method of allowing bypass of a ring signal in a voice
messaging system, comprising:
receiving a non-ring signal indicating a presence of an
incoming call to said voice messaging system; and
answering said incoming call by said voice messaging
30 system before a reception of any ring signal.

5. The method of allowing bypass of a ring signal in a voice messaging system according to claim 4, wherein said answering comprises:

- 5 substantially immediately playing an outgoing greeting message to a caller associated with said incoming call without requiring reception of any ring signal relating to said incoming call; and
allowing said caller to record a voice message.

10 6. The method of allowing bypass of a ring signal in a voice messaging system according to claim 4, wherein said answering comprises:

- substantially immediately allowing a caller associated with said incoming call to record a voice message without requiring reception
15 of any ring signal relating to said incoming call.

7. The method of allowing bypass of a ring signal in a voice messaging system according to claim 4, further comprising:

- inputting a request for a transmission of said non-ring signal
20 from a calling party's telephone.

8. Apparatus for allowing bypass of a ring signal in a voice messaging system, comprising:

- means for receiving a non-ring signal indicating a presence
25 of an incoming call to said voice messaging system; and
means for answering said incoming call by said voice messaging system before a reception of any ring signal.

9. The apparatus for allowing bypass of a ring signal in a voice messaging system according to claim 8, wherein said means for answering comprises:

5 means for substantially immediately playing an outgoing greeting message to a caller associated with said incoming call without requiring reception of any ring signal relating to said incoming call; and

means for allowing said caller to record a voice message.

10 10. The apparatus for allowing bypass of a ring signal in a voice messaging system according to claim 8, wherein said means for answering comprises:

15 means for substantially immediately allowing a caller associated with said incoming call to record a voice message without requiring reception of any ring signal relating to said incoming call.

11. The apparatus for allowing bypass of a ring signal in a voice messaging system according to claim 8, further comprising:

20 means for inputting a request for a transmission of said non-ring signal from a calling party's telephone.

12. A method of allowing a calling party to bypass a ring signal in a voice messaging system of a called party, said voice messaging system including voice message memory for recording a voice message, the method comprising:

5 providing a ring signal bypass module in said voice messaging system;

 activating said ring signal bypass module based on a request from said calling party; and

 bypassing all ring signals to said voice messaging system by
10 answering a call from said calling party before a reception of any ring signal.

13. The method of allowing a calling party to bypass a ring signal in a voice messaging system of a called party according to claim
15 12, further comprising:

 substantially immediately allowing said calling party to record a voice message in said voice message memory before reception of any ring signal.

20 14. The method of allowing a calling party to bypass a ring signal in a voice messaging system of a called party according to claim 12, further comprising:

 entering a request for performance of said step of bypassing all ring signals by said calling party.

25

15. The method of allowing a calling party to bypass a ring signal in a voice messaging system of a called party according to claim 12, wherein:

 said request is entered by said calling party before a
30 telephone number of said called party is dialed by said calling party.

16. A method of allowing bypass of a ring signal in a voice messaging system, comprising:

5 receiving a ring signal indicating a presence of an incoming telephone call to said voice messaging system;
answering said incoming telephone call;
detecting input of a predetermined code by said caller; and
if said predetermined code is input by said caller, allowing recording of a voice message by a caller without providing any audible
10 ring signal to a called party.

17. A method of allowing bypass of a ring signal in a voice messaging system, comprising:

15 receiving a ring signal from a central office indicating a presence of an incoming call to said voice messaging system; and
providing a caller a choice to bypass an audible ring signal to a user of said voice messaging system.

18. A method of allowing bypass of a ring signal in a voice messaging system according to claim 17, further comprising:

20 recording a voice message from said caller without first providing an audible ring signal to a user of said voice messaging system.

19. A method of allowing bypass of a ring signal in a voice messaging system according to claim 17, wherein:

25 by default, said voice messaging system does not audibly ring before recording a voice message.

20. A method of allowing bypass of a ring signal in a voice messaging system according to claim 17, wherein:

by default, said voice messaging system audibly rings up to a predetermined number of times before recording a voice message.

5

21. A method of allowing bypass of a ring signal in a voice messaging system according to claim 17, wherein:

said incoming call is answered by said voice messaging system substantially without audibly ringing said voice messaging system.

10

SCANNED

ABSTRACT

A voice messaging system such as a telephone answering device which allows a calling party to bypass the ring signal and substantially immediately allow the calling party to leave a voice message.

- 5 To activate the no ring signal access to the telephone answering device, the calling party preferably enters a control sequence prior to entering the telephone number of the called party to signal the appropriate central office to signal the telephone line of the called party that the ring signal is to be bypassed. The central office includes an appropriate ring signal
- 10 bypass request detection module adapted to detect a request for no ring signal from a calling party. In the disclosed embodiment, the calling party signals the central office using an appropriate sequence of DTMF tones, e.g., '*77', and the central office in turn signals the telephone line using a non-ring signal, e.g., a line reversal. If the called party's telephone
- 15 remains on-hook after a predetermined amount of time after the central office has signaled a no ring signal request, e.g., DirectAnswer™ signaling using a line reversal and appropriate DTMF tones as desired, the central office may proceed to send ring signals on the telephone line to the called party for functionality in a conventional sense.

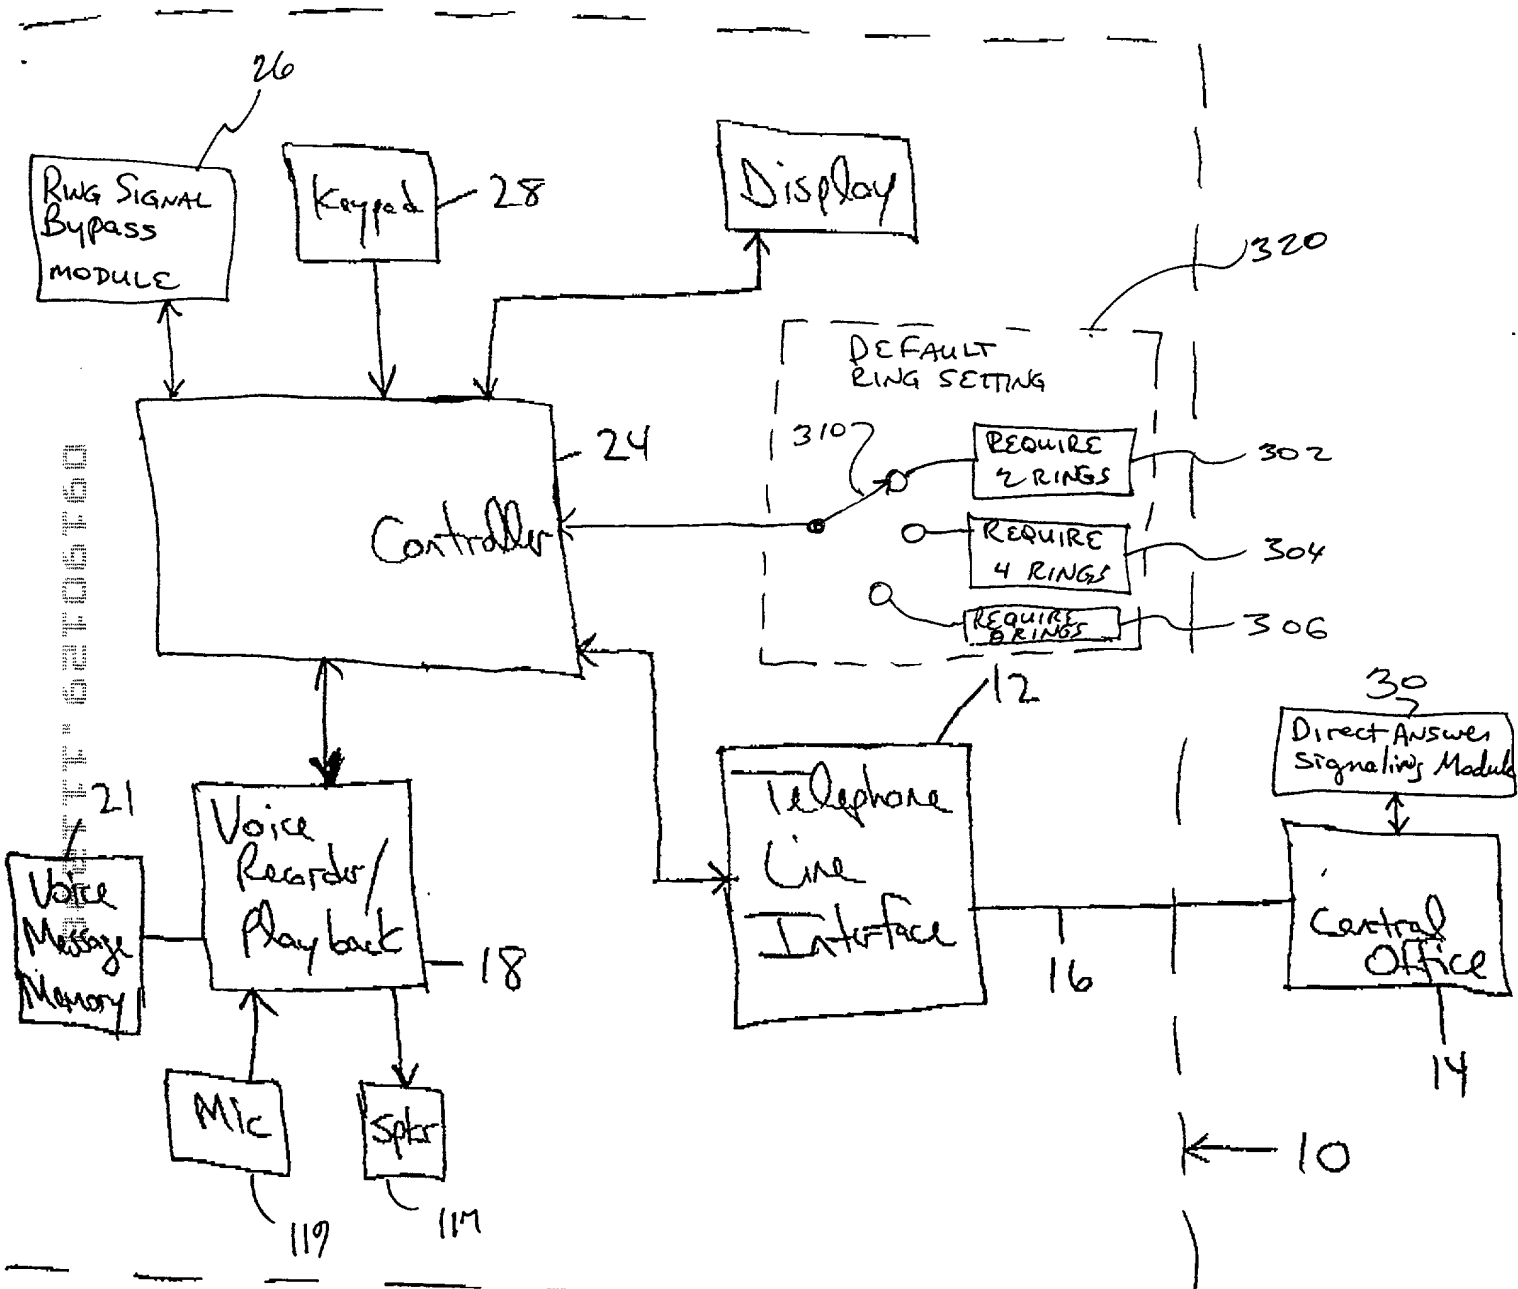


FIG 1

SECRET 62106T60

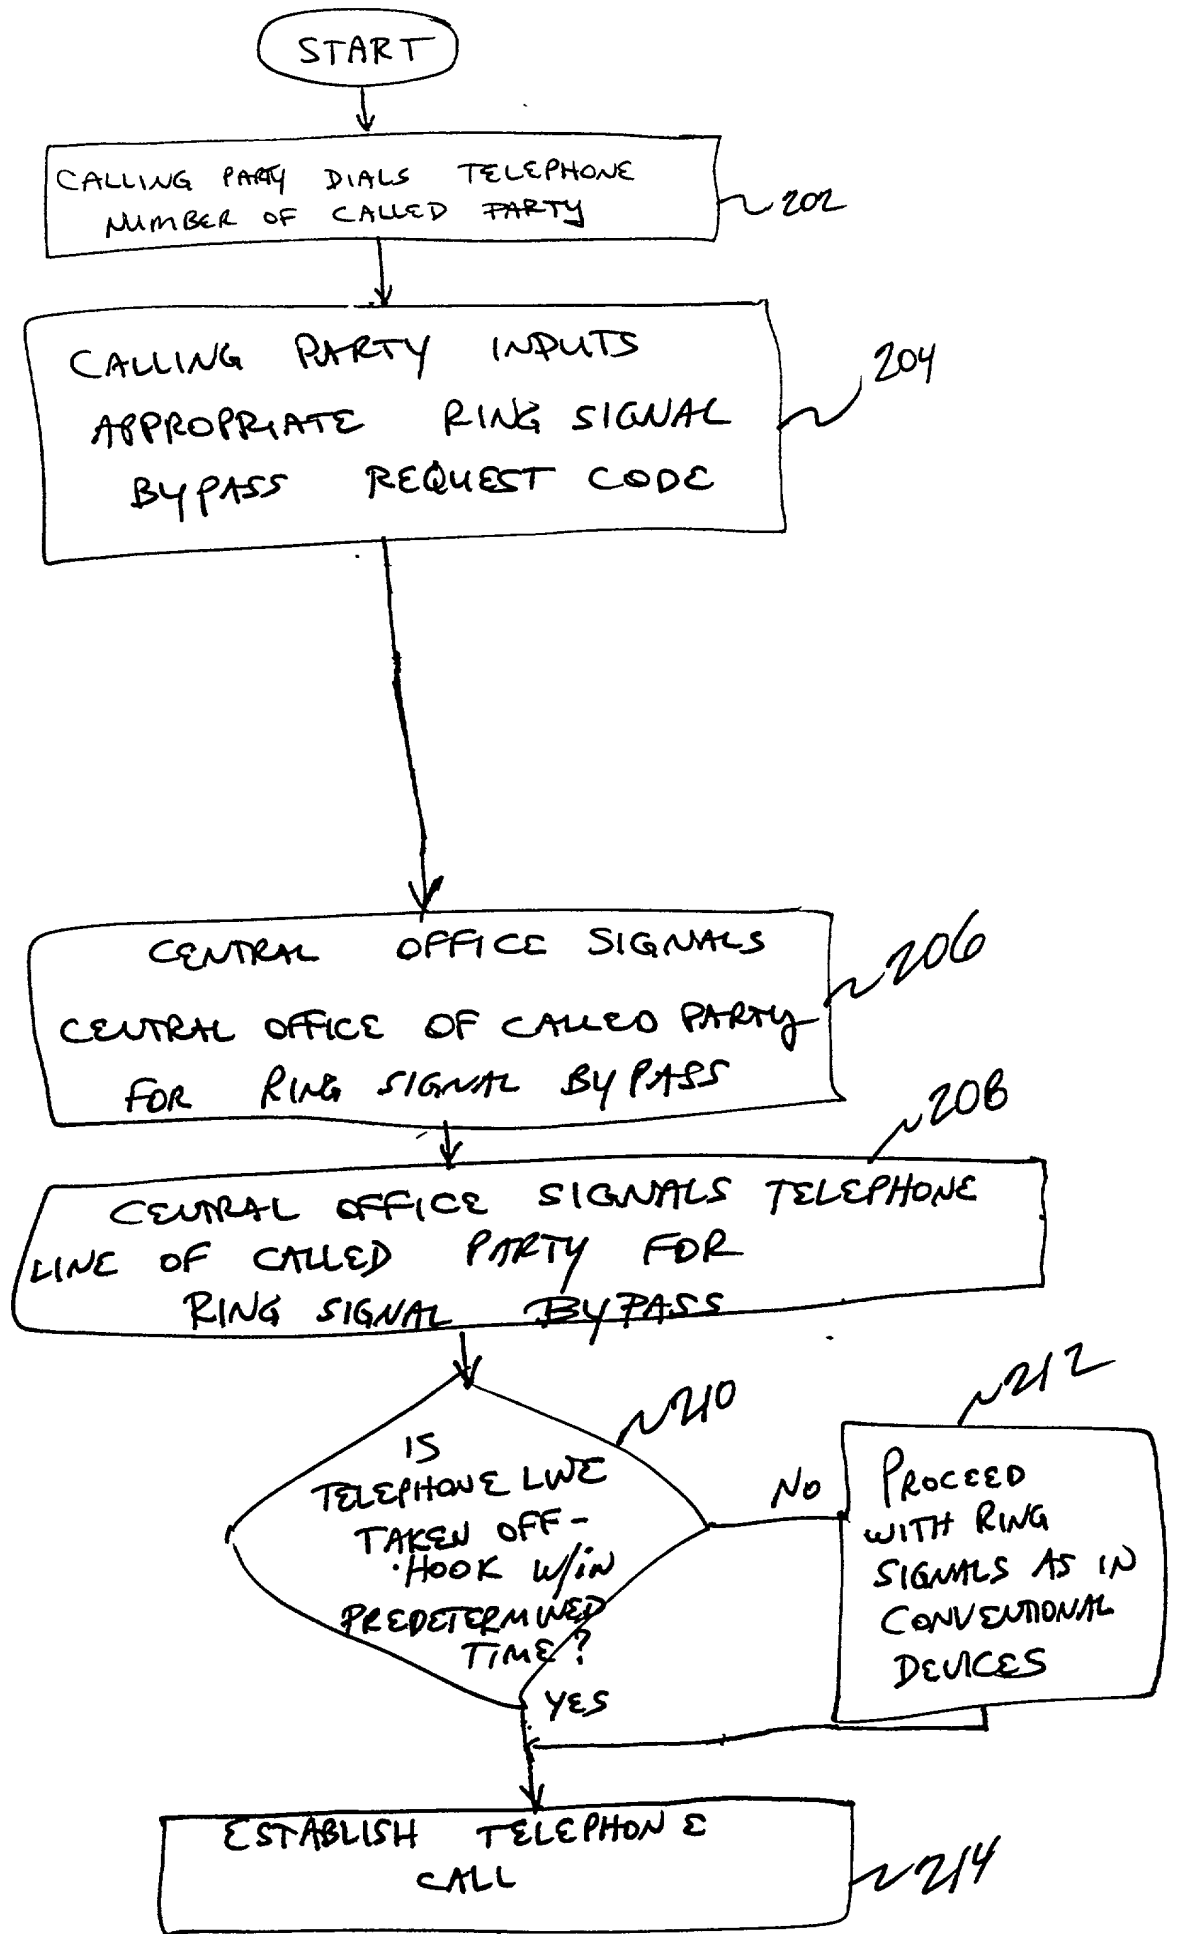


FIG. 2

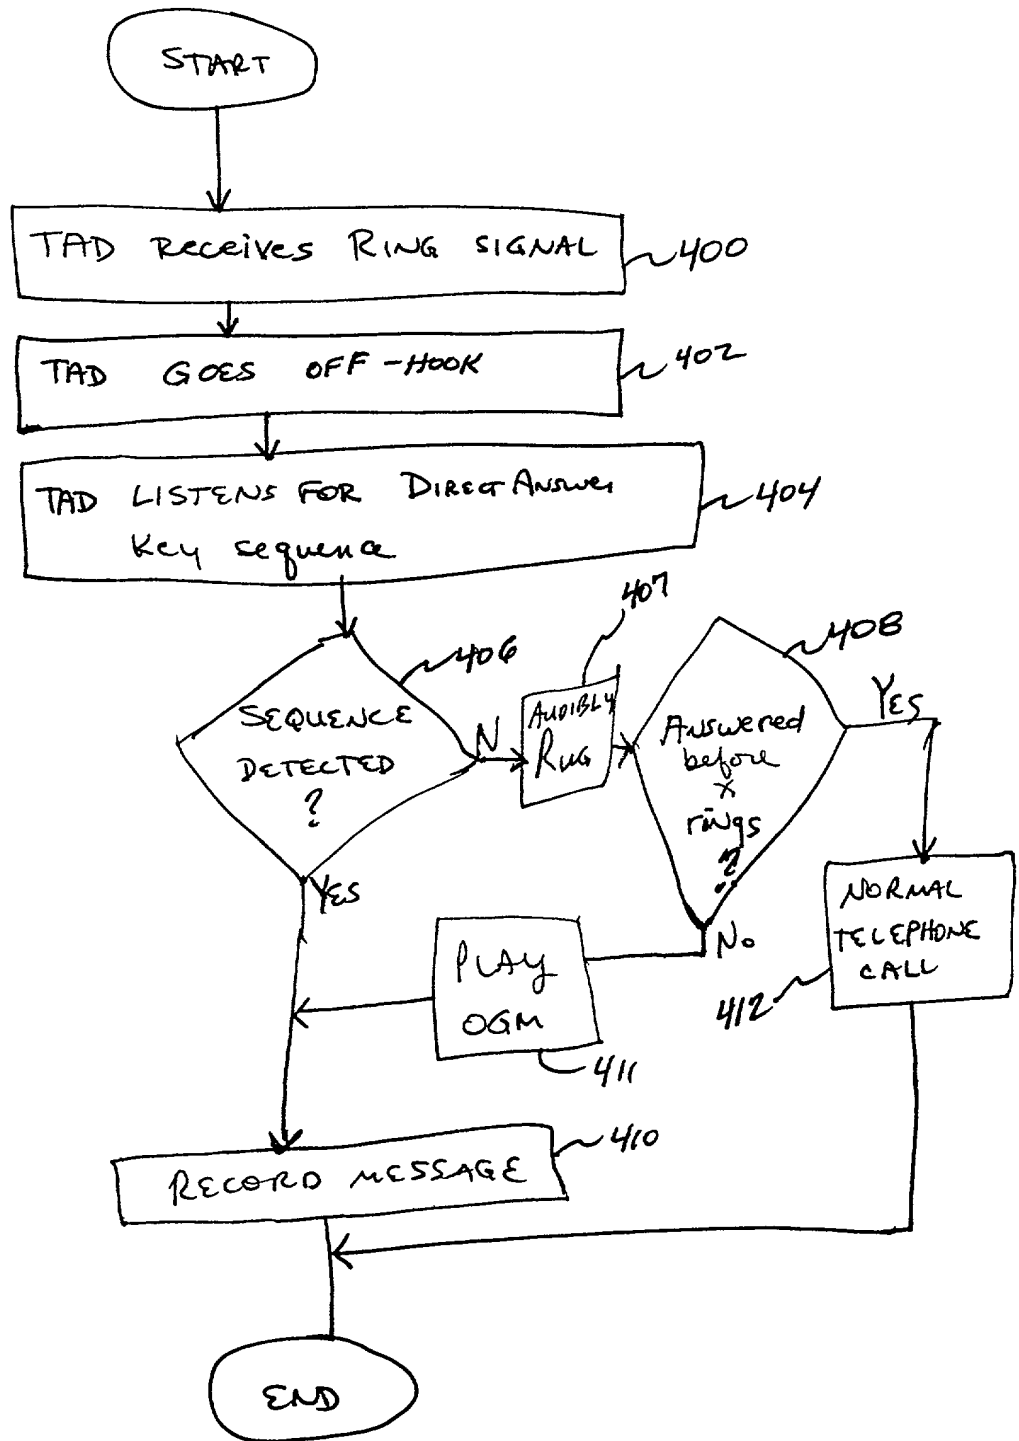


FIG. 3

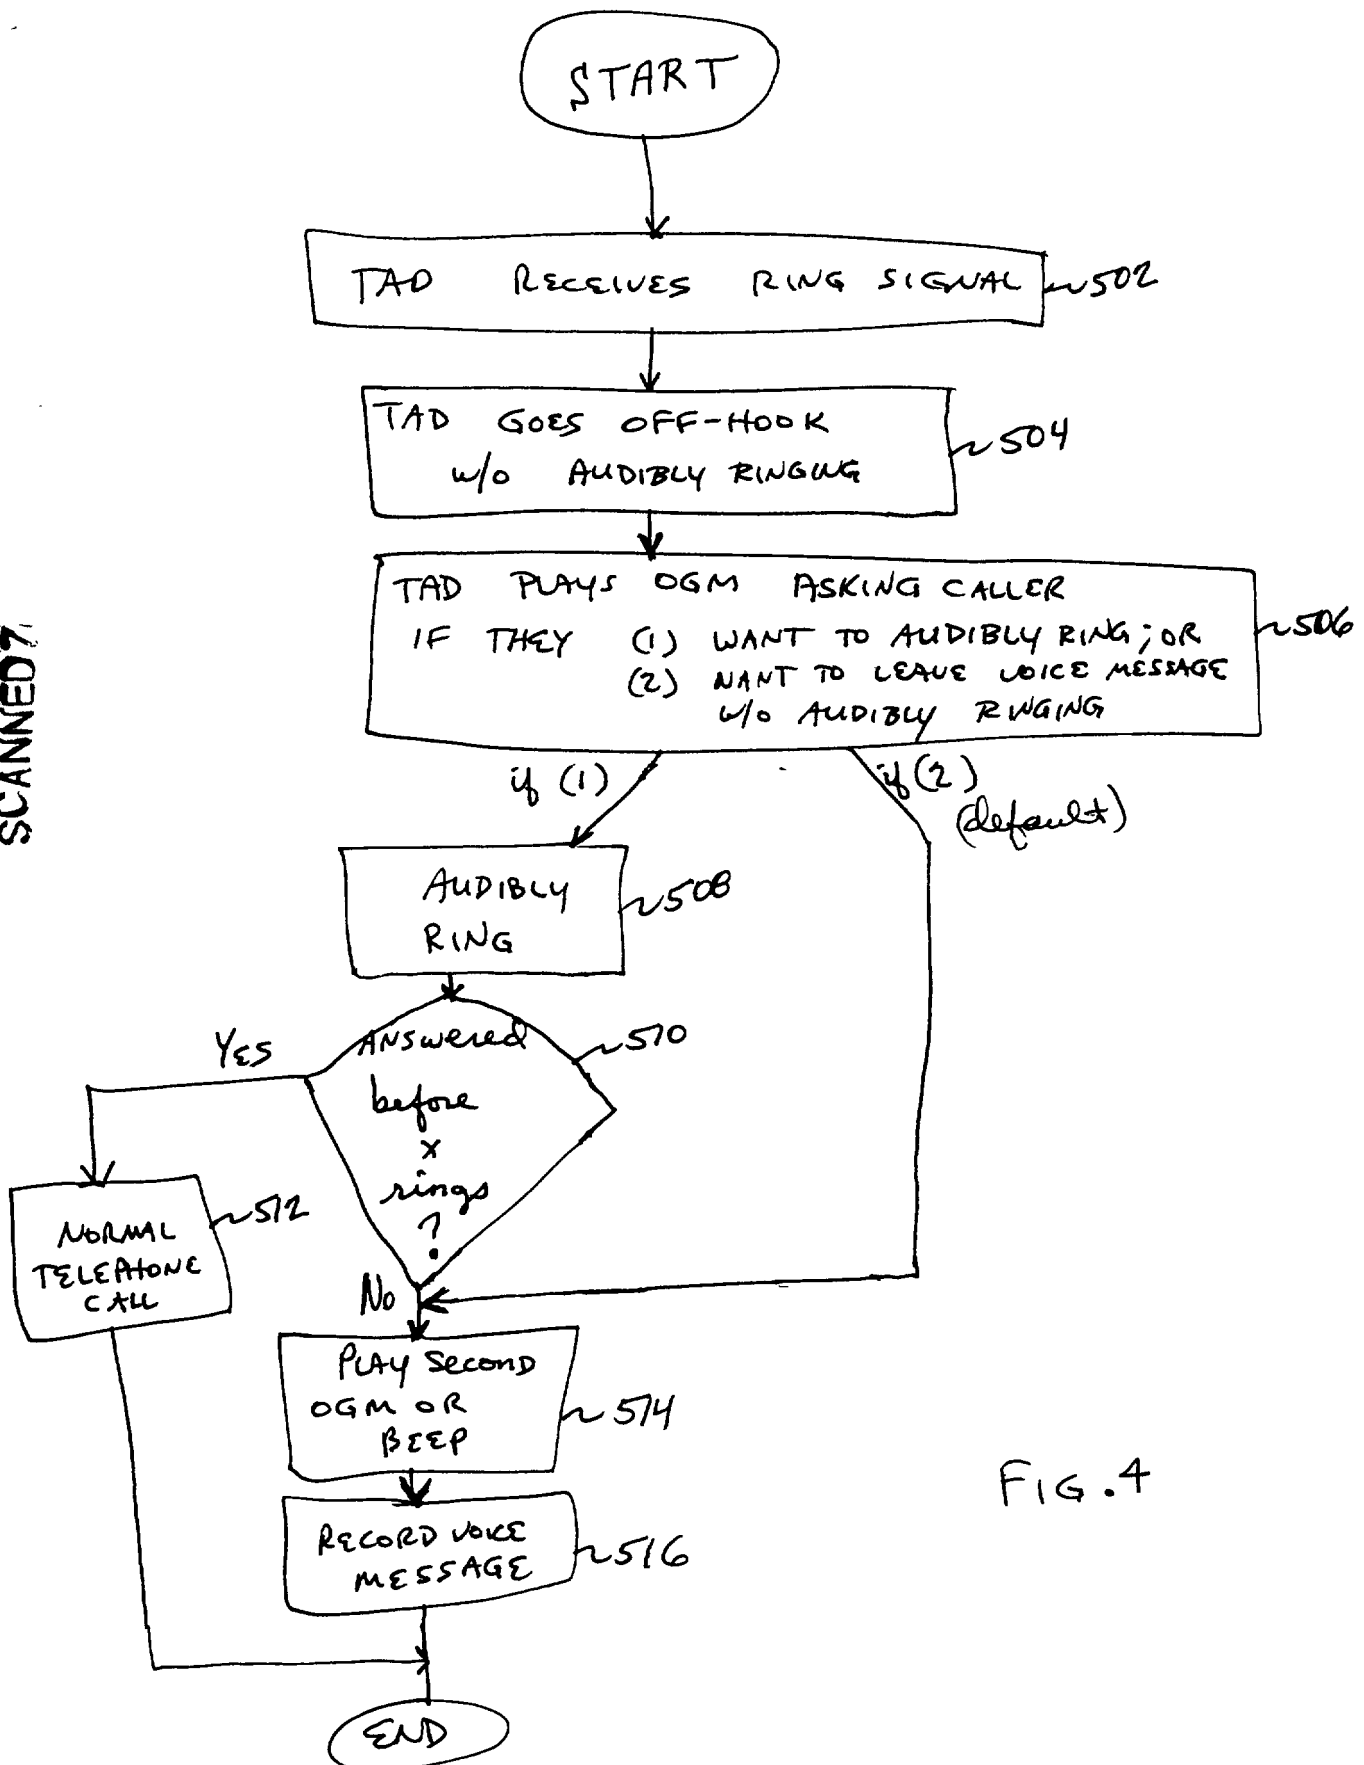


FIG. 4

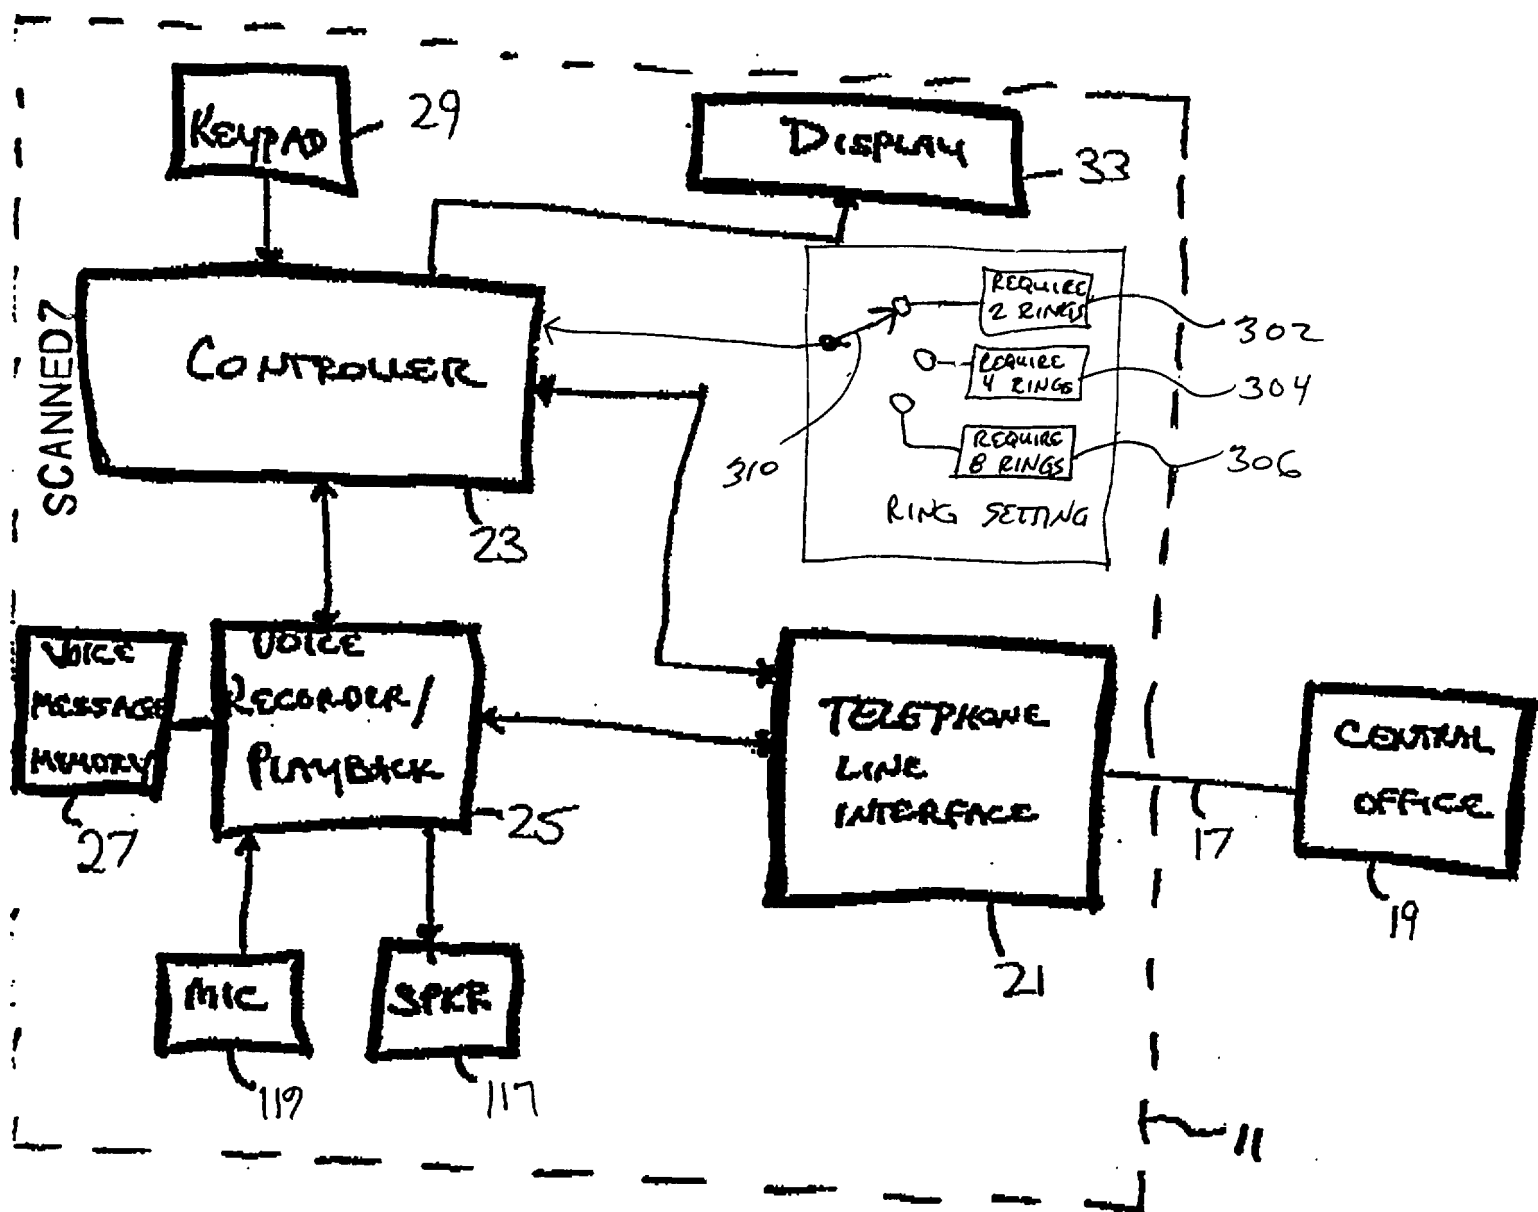


FIG. 5

PRIOR ART

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **VOICE MESSAGING SYSTEM CALLER RING BYPASS CONTROL** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

0919013911393

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Lester H. Birnbaum	(Reg. No. 25830)
Richard J. Botos	(Reg. No. 32016)
Jeffery J. Brosemer	(Reg. No. 36096)
Kenneth M. Brown	(Reg. No. 37590)
Donald P. Dinella	(Reg. No. 39961)
Guy Eriksen	(Reg. No. P-41736)
Martin I. Finston	(Reg. No. 31613)
James H. Fox	(Reg. No. 29379)
Barry H. Freedman	(Reg. No. 26166)
Julio A. Garceran	(Reg. No. 37138)
Mony R. Ghose	(Reg. No. 38159)
Jimmy Goo	(Reg. No. 36528)
Anthony Grillo	(Reg. No. 36535)
Stephen M. Gurey	(Reg. No. 27336)
John M. Harman	(Reg. No. 38173)
Donald E. Hayes, Jr.	(Reg. No. 33245)
John W. Hayes	(Reg. No. 33900)
Mark A. Kurisko	(Reg. No. 38944)
Irena Lager	(Reg. No. 39260)
Christopher N. Malvone	(Reg. No. 34866)
Scott W. McLellan	(Reg. No. 30776)
Martin G. Meder	(Reg. No. 34674)
Geraldine Monteleone	(Reg. No. 40097)
John C. Moran	(Reg. No. 30782)
Michael A. Morra	(Reg. No. 28975)
Gregory J. Murgia	(Reg. No. 41209)
Claude R. Narcisse	(Reg. No. 38979)
Joseph J. Opalach	(Reg. No. 36229)
Neil R. Ormos	(Reg. No. 35309)
Eugen E. Pacher	(Reg. No. 29964)
Jack R. Penrod	(Reg. No. 31864)
Daniel J. Piotrowski	(Reg. No. P-42079)
Gregory C. Ranieri	(Reg. No. 29695)
Scott J. Rittman	(Reg. No. 39010)
Eugene J. Rosenthal	(Reg. No. 36658)
Bruce S. Schneider	(Reg. No. 27949)
Ronald D. Slusky	(Reg. No. 26585)
David L. Smith	(Reg. No. 30592)
Patricia A. Verlangieri	(Reg. No. P-42201)
John P. Veschi	(Reg. No. 39058)
David Volejnicek	(Reg. No. 29355)
Charles L. Warren	(Reg. No. 27407)

20190419 1439

Eli Weiss

(Reg. No. 17765)

I hereby appoint the attorney(s) on ATTACHMENT A as associate attorney(s) in the aforementioned application, with full power solely to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected with the prosecution of said application. No other powers are granted to such associate attorney(s) and such associate attorney(s) are specifically denied any power of substitution or revocation.

Full name of 1st joint inventor: **Joseph M. CANNON**

Inventor's
signature



Date

11/4/1998


Residence: **Harleysville, Montgomery County, Pennsylvania**

Citizenship: **USA**

Post Office Address: **913 Harcourt Lane, Harleysville, Pennsylvania 19438**

Full name of 2nd joint inventor: **James A. JOHANSON**

Inventor's
signature

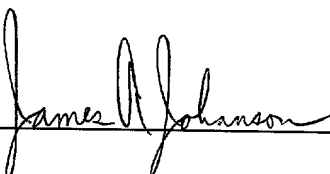

Date

11/4/98

Residence: **Macungie, Lehigh County, Pennsylvania**

Citizenship: ~~CHINA~~ **USA**

Post Office Address: **6336 Larch Circle, Macungie, Pennsylvania 18062**

09190439 11398

Full name of 3rd joint inventor: **Doreen M. MICHELETTI**

Inventor's
signature

Doreen M. Michelletti

Date 11/10/98

Residence: **Zionsville, Lehigh County, Pennsylvania**

Citizenship: **USA**

Post Office Address: **5621 Highfield Drive, Zionsville, Pennsylvania 18092**

09100430-141298
SECRET

ATTACHMENT A

Attorney Name(s): William H. Bollman, Esq. Reg. No.: 36,457

Telephone calls should be made to **Farkas and Manelli PLLC** at:

Phone No.: 202-261-1020

Fax No.: 202-887-0336

All written communications are to be addressed to:

Farkas and Manelli PLLC
2000 M Street, N.W.
7th Floor
Washington, D.C. 20036-3307

SCANNED